


MOTOR PERFORMANCE		Winding codes	3QA			
		UNIT	FREE AIR COOLING			
Fp	Peak force	N	795			
Fc	Continuous force	N	155			
Fs	Standstill force	N	117			
Ip	Peak current	Arms	17.4			
Ic	Continuous current	Arms	2.27			
Is	Standstill current	Arms	1.72			
vs	Rated low speed	mm/s	0.16			
Pc	Power dissipation @ Ic	W	68.0			
Fd	Max. detent force (average to peak)	N	21			
Fa	Attraction force	N	1720			

MOTOR SETTING		UNIT				
Kt	Force constant	N/Arms	71.2			
Ku	Back EMF constant (*)	Vrms/(m/s)	43.1			
Km	Motor constant	N/√W	23.4			
R20	Electrical resistance at 20°C (*)	Ohm	6.17			
L	Electrical inductance (*)	mH	35.1			
rth	Thermal time constant	s	1970			
Rth	Thermal resistance	K/W	1.60			
2tp	Magnetic period	mm	32			
mw	Magnetic way mass	kg/m	7.96			
mm	Motor mass	kg	1.17			

MOTOR ENVIRONMENT		UNIT				
Udc	Nominal DC bus voltage	VDC	600			
Gm	Mechanical gap	mm	0.90			
Ss	Stator exchange surface	m²	0.02			
x	Assumed stroke	m	0.29			
θamb	Ambient temperature	°C	20			
θmax	Maximum coil temperature	°C	130			

Notes: (*) terminal to terminal.
 Hypotheses and tolerances are in ETEL Integration Manual.
Caution: Any use of the motor beyond speed/force limit could lead to hazardous voltage and serious injuries. Customer is responsible for setting safeties/limitations that will keep the motor in its safe operating area. ETEL cannot be held responsible if the motor is used in an improper way.

3QA - FREE AIR COOLING - 600V

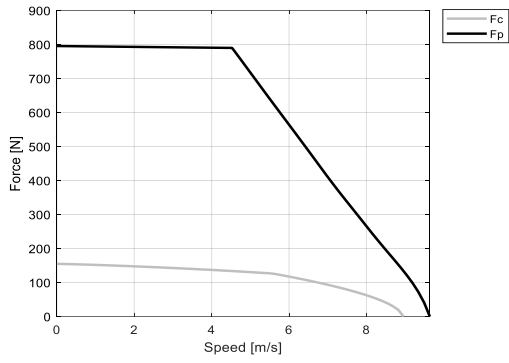

3QA - FREE AIR COOLING - 300V

